

SCREENVIEW

5% EXTERIOR SCREEN FABRIC


NEW
UPDATED COLOUR RANGE

SUN PROTECTION FABRIC

ScreenView 5% Exterior Screen is a heavy duty awning fabric and is available in a broad range of 10 contemporary colours which can match either your interior blinds or exterior façade.

ScreenView 5% Exterior Screen Fabric is perfect for external windows and for screening pool and alfresco entertaining areas. It offers sun and glare protection, fantastic outward visibility and just enough inward light filtration; offering a mid to high-level of privacy from the outside world during the day.

Shades range from the light, natural tones of sandstone and pebble to the more industrially-inspired hues of ebony and slate grey. ScreenView 5% Exterior Screen Fabric is backed by our 10 year guarantee.

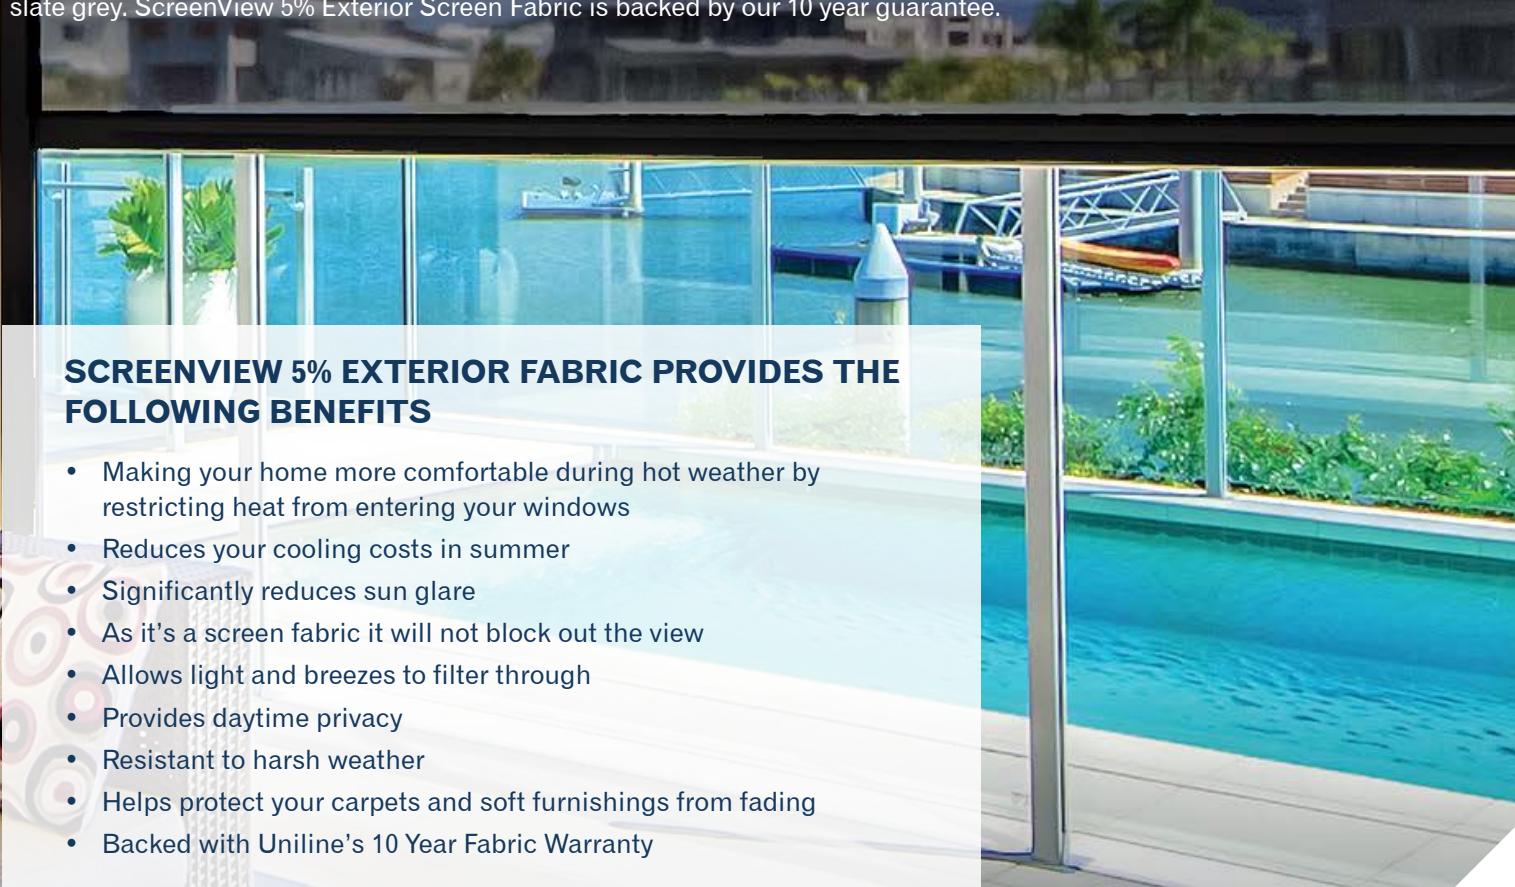

SCREENVIEW 5% EXTERIOR FABRIC PROVIDES THE FOLLOWING BENEFITS

- Making your home more comfortable during hot weather by restricting heat from entering your windows
- Reduces your cooling costs in summer
- Significantly reduces sun glare
- As it's a screen fabric it will not block out the view
- Allows light and breezes to filter through
- Provides daytime privacy
- Resistant to harsh weather
- Helps protect your carpets and soft furnishings from fading
- Backed with Uniline's 10 Year Fabric Warranty

IT'S NO WONDER THAT
SCREENVIEW 5% EXTERIOR FABRIC
IS A POPULAR CHOICE FOR AUSTRALIAN HOMES.



SCREENVIEW



5% EXTERIOR SCREEN FABRIC

Surfmist	Dune	Wallaby	Woodland Grey	Basalt	Monument	Shale Grey	Windspray	Black Grey	Ebony
----------	------	---------	---------------	--------	----------	------------	-----------	------------	-------

TECHNICAL SPECIFICATIONS – SCREENVIEW 5% EXTERIOR

APPLICATION:

PROTÉGER	✓
AWNINGS	✓
WIRE GUIDE	✓
ARCHLINE	✓
AUTOMATIC AWNINGS	✓
FOLDING ARM	✓

SPECIFICATIONS:

AIR QUALITY	Greenguard® certified to guarantee Air Purity
WARRANTY	10 Year fabric Warranty
PROTECTION	Uniguard fabric protection system
LIGHT FASTNESS	Fully Fade Resistant: Result 8 ISO 105-B02:1994 (Xenon Arc Method)
COMPOSITION	75% PVC, 25% Polyester
FIRE CLASSIFICATION	Complies with General Requirements of the Building Code of Australia for Fire Hazard Properties of materials used. Tested to AS1530.2 and AS1530.3. Test reports available on request..
OPENNESS FACTOR	5%
WEIGHT	615gsm
THICKNESS	0.76mm
SHADE COVER	95%
WIDTH	3.2mtr

FABRIC TYPE:

BLOCKOUT	
TRANSLUCENT	
SCREEN	✓

CARE: Surface dust should be removed with a duster or soft cloth. Fabric can be wiped with a damp sponge and wiped with a soft cloth. Never use abrasive or solvent-based products.

NOTE: Refer to Uniline website for up to date fabric and swatch information.



IT'S YOUR CHOICE.

The preferred window covering system supplier to the industry.

Australia Free Call: 1800 777 331 | sales@uniline.com.au | uniline.com.au

New Zealand Free Call: 0800 700 801 | salesnz@uniline.com.au | uniline.co.nz

